



Classic Racks

Information & Specifications



(model CLAS24-II shown)

The HSA Classic Racks give you a convenient way to house and protect a wide variety of 19" rack mount and non-rackmount electronic equipment. Very suitable for boardroom, Houses of Worship, educational, corporate, recording and other professional environments, the HSA Classic Racks are an elegant and easy way to aesthetically blend audio, video and many other electronic systems into their surroundings.


Materials & Assembly: Classic Racks are handcrafted from a selection of engineered core and multi-core panels with premium Red Oak faces for high dimensional integrity, consistency and strength. Extra thick contour edging is used to match the oak or other optional/custom wood species or high pressure laminates.

Rack: The 12, 16 and 24 space extra deep standard open face racks are fitted with heavy-duty steel rails with extra half-rack tapped screw holes to allow for a wide variety of equipment spacing. A full 3.75 inch clearance is given between the rack rail and the front edge of the rack. The rack rear is a completely finished, 3/4" thick, tab-locked and machine screw secured, removable door panel for easy access, great appearance and maximum security. The door panel features a bottom cable cutout for wire routing and is easily optioned for fan mounting, ventilation, connector panels, etc. The rack floor comes standard with ventilation slotting and a large cable/wiring floor pass through. Other custom modifications and variations are available.

Finish: A variety of stain colors are available with our popular and environmentally friendly waterborne finishing system. These advanced waterborne stains, sealers and finish coats produce a beautiful grain pattern and depth of color. They maintain the natural feel of the wood yet offer some of the best protection from abrasion and spills and keep looking great with minimal upkeep. Actual color samples are available to help you make your selection.

- ▶ The most beautiful & functional solution for housing electronic systems
- ▶ A variety of options are available
- ▶ 12, 16 and 24 rack space versions standard
- ▶ "2 screws" easy access removable rear door with lower cable exit
- ▶ Well-ventilated floor with large, easy wiring entrance/exit
- ▶ Solidly & carefully crafted
- ▶ With a variety of finishes

Other Classic Rack Benefits: The Classic Racks offer additional safety and security by organizing equipment and wiring which, in modern open installations, could be a source of many problems. Being able to "lock-down" the system prevents unauthorized tampering with equipment and wiring between uses. Furthermore, the HSA Classic Racks (and our other fine wood furnishings) conveys an image of professionalism and quality, presenting your audio, video, lighting or any electronic system in the very best way and as a matching, integral part of its environment.

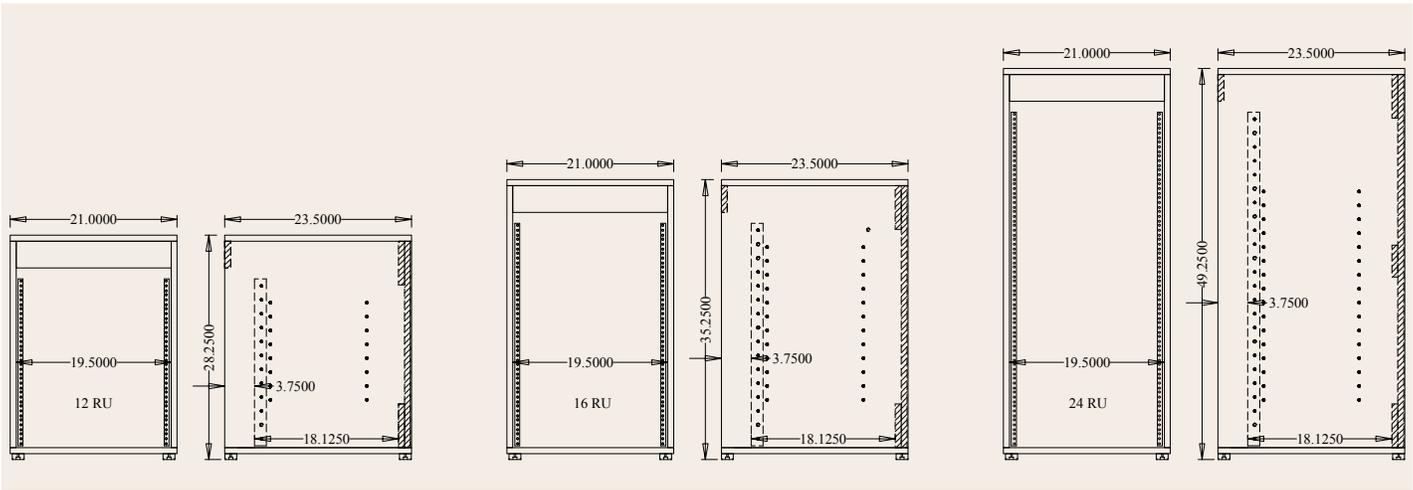

Left to right views of a Classic Series Rack shows view of rear with machine screw secured back door panel in place, door panel removed and front view of rack. Note the floor ventilation slotting and the cable/conduit cutout in rack floor and cable exit in rear door panel.

Classic Racks are available with the following options/customizations:

- CASTERS Standard Caster Set (4) for Classic, Slant, PR or RollRacks
- CASTERS-HD 4" Heavy Duty Caster Set (4) for Classic, Slant, PR or RollRacks
- DOOR12 Flat panel, locking, 270 degree full-swing front door for CLAS12
- DOOR16 Flat panel, locking, 270 degree full-swing front door for CLAS16
- DOOR24 Flat panel, locking, 270 degree full-swing front door for CLAS24
- DUALFAN Dual, quiet fan system (w/ temperature sensor) installed in rear door
- RRAIL10 10RU Rear rail rack set installed (for CLAS12 or larger)
- RRAIL12 12RU Rear rail rack set installed (for CLAS16 or larger)
- RRAIL20 20RU Rear rail rack set installed (for CLAS24 or larger)
- RVENT Ventilation slots added to rack rear door/panel
- TGROM Standard 2.5" capped grommet installed in rack top
- HDWESILV Satin/Silver finish hardware
- COVER Heavy-duty padded dust cover

These and more options are available. Contact your dealer, or HSA directly, or visit our website at www.hsarolltops.com for more information and design assistance.

Drawing Notes: The maximum usable rack depth for equipment is considered 18.125" in each rack model. The nominal distance between the OPTIONAL rear rack rails and the standard front rails is 16.00" from face-to-face. There is a 3.75" maximum clearance between the front edge of the rack body and the face of the standard front rack rails. This clearance is adequate for most applications but be sure to measure equipment to be installed to verify this. If an OPTIONAL front door is installed, a small amount of this clearance is taken by the lock assembly. Locks are approximately 0.5" thick out to about 2.750" from the sidewalls and about 0.75" thick within about 0.875" of the sidewalls. Although you can be sure that standard 19" rack mount equipment will mount across our rack rails, wood is a natural product and overall working tolerances can be in the range of +/- 0.25" normally.

WARRANTY: HSA warrants standard products for a period of one year and covers defects in materials and workmanship. Wood is a natural material and every piece is unique. Deviations in the final products from each other or samples in finish, color, contrast, density and pattern are to be expected and is part of the beauty and appeal in wood products and are not considered defects under our warranty. The warranty does not cover improper installation or use of HSA products. The warranty also does not cover appearance or appearance items, finish items or any malfunctions caused by misuse or improper operation. HSA's liability does not include any consequential or resulting damage to person, property, equipment, goods, merchandise, profits, goodwill, or reputation arising out of any defect in or failure of product. HSA expressly disclaims warranty for a particular purpose and only designs and manufactures product according to dimensions furnished by the buyer or as stated in literature, website publication or drawings by HSA (which are subject to change without notice). HSA does not guarantee that another manufacturer's piece or pieces of equipment will fit into one of our designs or products as HSA does not exercise control over the sizes, arrangement, wiring or application of the other manufacturer's products or the end-user's operating preferences. Therefore the determination of whether or not equipment or a system will properly fit into an HSA product is a decision resting solely on the buyer prior to purchase. Warranty items will be repaired or replaced at our option without charge for materials or labor, provided such items are returned for inspection, transportation prepaid, to HSA, Inc., Mishawaka, IN.